

X-PLANE

NAVIGATION DATA FOR NAVAIDS (USER_NAV.DAT & EARTH_NAV.DAT) FILE SPECIFICATION

VERSION 1150

REVISION HISTORY

10 Aug 2016	Spec updated for X-Plane 11
10 Oct 2016	Added encoding for SBAS service provider in LTP name
29 Nov 2018	Added documentation for NDB and VHF service volumes or ranges
12 Mar 2020	Added magnetic front course information to ILS localizers

APPLICABILITY

This specification (XP NAV1150) is supported in X-Plane 11.50b1 and later. It is identified in the data files as “1150 Version” on the second row of the file.

The prior specification for navaid data was XP NAV1100, which is compatible with X-Plane 11.00 – 11.99. Changes in the spec for XP NAV1100 were:

- Added localizer front course information for localizers. In addition to the true orientation in the world, localizers now also carry their magnetic front course, which is close but in almost all places not actually equal to the true course plus the magnetic variation.

OVERVIEW & SCOPE

This specification defines all radio navigation data for X-Plane, including NDBs (DB-records), VORs (D-records, incl. VORTACs and VOR-DMEs), ILS components (PI- and PM-records, localizers, glideslopes, marker beacons), GBAS correction stations and SBAS/GBAS approach path point data (PP-, PQ-, and PT-records). The effect of this data is to:

- Allow these radio navigation facilities to be used when flying in X-Plane.
- Display the navigation facilities on X-Plane's chart.
- Render objects in the X-Plane scenery system to represent each physical facility.
- Allow these nav aids to be selected in X-Plane's GPS and FMC systems.
- Allow path points be used by X-Plane's GPS and FMC systems.

BASIC CONCEPTS

- Latitudes and longitudes are described in a decimal notation (e.g. 20.12345678).
 - A latitude of 50 degrees 30 minutes south would be defined as -50.50000000
- North latitudes and east longitudes are positive. South latitudes and west longitudes are negative.
- All headings are referenced to true north (not magnetic north). X-Plane has an internal model of magnetic variation.
- Terminal NDBs, ILS components and approach path points must specify the airport whose terminal area they belong to
- Enroute nav aids must specify the ICAO region code according to ICAO document No. 7910


FILE CHARACTERISTICS

The earth_nav.dat (and nav.dat) files are plain text files:

- Fields in the data can be separated by one or more white space (space, tab) characters.
- By default, the files are generated so that columns of data are consistently aligned, but this is not required.
- Glideslope records must come later in the file than their associated localizer
- LTP/FTP records must come later in the file than their associated FPAP
- Paired DME records must come later in the file than their associated VOR or TACAN
- The above can also be achieved by sorting the file strictly using the first column

FILE STRUCTURE

The navigation data can be edited in X-Plane in the “Location | Local Map” view, and by clicking on the “edit” button at the top of the screen.

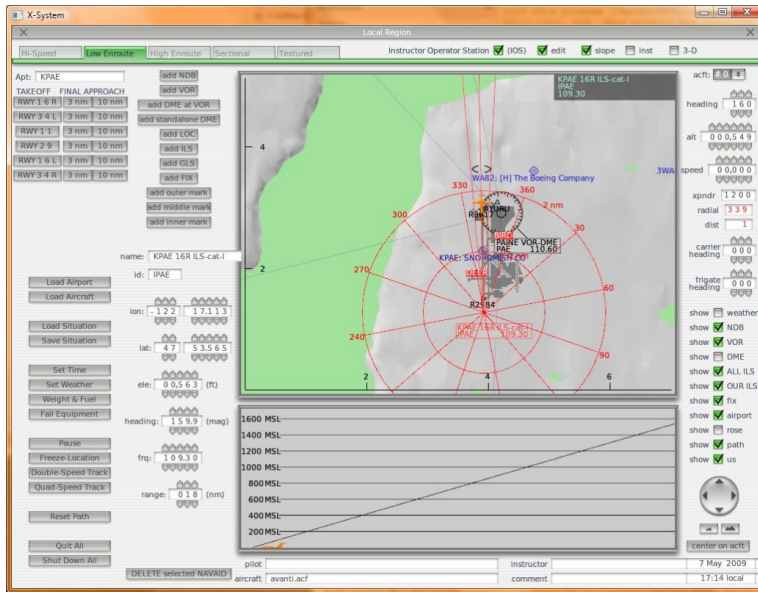

If data is changed here, then X-Plane will ask for confirmation that the new data should be saved when quitting X-Plane. This will ensure that all structural requirements listed here for airport data are met. Manually edited data is dumped into the user_nav.dat file and kept separate from data supplied by providers. On load, navaids in the user_nav.dat file override navaids in the global earth_nav.dat file.

[Note that X-Plane displays headings for an ILS in magnetic degrees on this screen, but that this data is converted to a true heading when the data is saved to earth_nav.dat.]

In common with most other X-Plane data file specification, header rows of data define the origin (“I” = Intel byte order or “A” = Motorola byte order) of a particular copy of a file and define the file specification version. The file specification must include the four-digit AIRAC cycle date (e.g. 1602 for the AIRAC cycle effective 4-Feb-16, refer to https://www.nm.eurocontrol.int/RAD/common/airac_dates.html for cycle dates), an 8-digit build date and the reference to this document. A copyright message may be added, while the total length of this line is not to exceed 1024 characters:

```
I
1150 Version - data cycle 1802, build 20200312, metadata NavXP1150. Copyright © 2020, Robin A. Peel (robin@xsquawkbox.net)...
```

Subsequent rows of data define each navaid, sequence as defined under “File Characteristics”.

The file is terminated by a ‘99’:

```
99
```

ROW CODES

Each row of data begins with an integer code that defines the type of data:

Row Code	Meaning	Comment
2	NDB (Non-Directional Beacon)	Includes NDB component of Locator Outer Markers (LOM)
3	VOR (including VOR-DME and VORTACs)	Includes VORs, VOR-DMEs, TACANs and VORTACs
4	Localizer component of an ILS (Instrument Landing System)	
5	Localizer component of a localizer-only approach	Includes for LDAs and SDFs
6	Glideslope component of an ILS	Frequency shown is paired frequency, <u>not</u> the DME channel
7	Outer markers (OM) for an ILS	Includes outer marker component of LOMs
8	Middle markers (MM) for an ILS	
9	Inner markers (IM) for an ILS	
12	DME, including the DME component of an ILS, VORTAC or VOR-DME	Paired frequency display <u>suppressed</u> on X-Plane's charts
13	Stand-alone DME, or the DME component of an NDB-DME	Paired frequency will be displayed on X-Plane's charts
14	Final approach path alignment point of an SBAS or GBAS approach path	Will not appear in X-Plane's charts
15	GBAS differential ground station of a GLS	Will not appear in X-Plane's charts
16	Landing threshold point or fictitious threshold point of an SBAS/GBAS approach	Will not appear in X-Plane's charts

EXAMPLE DATA

Here is some example data for the Seattle, Washington, USA area (note the separate data row for the DME component of the Seattle VORTAC):

```

2  47.632522222 -122.389516667      0      362      25      0.000  BF  ENRT K1 NOLLA/KBFI LMM RW13R NDB
3  47.435372222 -122.309616667      0     11680     130     19.000  SEA  ENRT K1 SEATTLE VORTAC
12 47.435372222 -122.309616667      0     11680     130      0.000  SEA  ENRT K1 SEATTLE VORTAC DME
4  47.428408333 -122.308063889     425     11030      25  59220.343  ISNQ  KSEA K1 16L ILS-cat-III
6  47.460816667 -122.309394444     425     11030      25  300180.343  ISNQ  KSEA K1 16L GS
9  47.466013889 -122.307733333      0         0         0      0.000  ISNQ  KSEA K1 16L IM
12 47.434333333 -122.306300000     369     11030      25      0.000  ISNQ  KSEA K1 SEATTLE-TACOMA INTL DME-ILS
14 47.437969722 -122.311211111     429     61010      0.0     180.339  R16CY KSEA K1 16C LPV
16 47.463809028 -122.310985000     429     61010    56.6  300180.339  R16CY KSEA K1 16C WAAS

```

DEFINITION OF DATA FIELDS

Each column in each row is defined below, using the example data from Seattle shown above. Note that:

- Some row codes store data in an identical specification, and these have been grouped together in the table below (e.g. the marker beacons).
- The specification aims to be internally consistent. For example, the format or latitudes and longitudes is always the same, and all headings/orientations are defined as true (not magnetic) degrees.

Row	Meaning <i>Example value</i>	Comment <i>Explanation</i>	<i>Valid values</i>
2	NDB	Non-directional beacon	
	2	Row code for an NDB	2
	47.63252778	Latitude of NDB in decimal degrees	Eight decimal places supported
	-122.38952778	Longitude of NDB in decimal degrees	Eight decimal places supported
	0	Elevation in feet above MSL	Integer. Used to calculate service volumes.
	362	Frequency in kHz	Integer. Decimal frequencies not supported.
	50	NDB class (formerly reception range in nautical miles)	15 = locator, 25 = low power, 50 = normal, 75 = high power NDB
	0.0	Not used for NDBs	0.0
	BF	NDB identifier	Up to four characters. Unique within ICAO region
	ENRT	NDB terminal region identifier or ENRT for enroute NDBs	Airport code for terminal NDBs, ENRT otherwise
	K1	ICAO region code of enroute NDB or terminal area airport	Must be region code according to ICAO document No. 7910 For terminal NDBs, the region code of the airport is used
	NOLLA NDB	NDB name	Text, suffix with "NDB"
3	VOR	Includes VOR-DMEs and VORTACs	
	3	Row code for a VOR	3
	47.43538889	Latitude of VOR in decimal degrees	Eight decimal places supported
	-122.30961111	Longitude of VOR in decimal degrees	Eight decimal places supported
	354	Elevation in feet above MSL	Integer. Used to calculate service volumes.
	11680	Frequency in MHZ (multiplied by 100)	Integer - MHZ multiplied by 100 (e.g. 123.45MHz = 12345)
	130	VOR class (formerly reception range in nautical miles)	25 = terminal, 40 = low altitude, 130 = high altitude, 125 = unspecified but likely high power VOR. Uses the higher of 5.35 class and 5.149 figure of merit.
	19.0	Slaved variation for VOR, i.e. direction of the 0 radial measured in true degrees	Up to three decimal places supported
	SEA	VOR identifier	Up to four characters. Unique within ICAO region
	ENRT	ENRT for all VORs	Always ENRT
	K1	ICAO region code	Must be region code according to ICAO document No. 7910
	SEATTLE VORTAC	VOR name	Text, suffix with "VOR", "VORTAC", "TACAN" or "VOR-DME"

Row	Meaning <i>Example value</i>	Comment <i>Explanation</i>	<i>Valid values</i>
4, 5	LOC	Includes localizers (incl. LOC-only), LDAs and SDFs	
	4	Row code for a localizer associated with an ILS	4=ILS localizer, 5=stand-alone localizer (incl. LOC, LDA & SDF)
	47.42939200	Latitude of localizer in decimal degrees	Eight decimal places supported.
	-122.30805600	Longitude of localizer in decimal degrees	Eight decimal places supported.
	338	Elevation in feet above MSL	Integer.
	11030	Frequency in MHZ (multiplied by 100)	Integer - MHz multiplied by 100 (e.g. 123.45MHz = 12345)
	25	Maximum reception range in nautical miles	Integer - Terminal range is 25nm by default
	59220.343	Localizer bearing in <u>true</u> degrees prefixed by integer <u>magnetic</u> front course times 360	Up to three decimal places supported. Magnetic Front Course in integer degrees multiplied by 360 and added (e.g. front course of 164 degrees magnetic on localizer true bearing of 180.343 degrees becomes 59,040 + 180.343 = 59,220.343). This allows the true front course to be read accurately by clients unaware of the magnetic part, because $fmod(59220.343, 360) = 180.343$.
	ISNQ	Localizer identifier	Up to four characters. Usually start with "I". Unique within airport terminal area
	KSEA	Airport ICAO code	Up to four characters. Must be valid airport code
	K1	Airport ICAO region code	Must be region code according to ICAO document No. 7910
	16L	Associated runway number	Up to three characters
	ILS-cat-III	Localizer name	Use "ILS-cat-I", "ILS-cat-II", "ILS-cat-III", "LOC", "LDA" or "SDF"
6	Glideslope	Glideslope associated with an ILS	
	6	Row code for a glideslope	6
	47.46081700	Latitude of glideslope aerial in decimal degrees	Eight decimal places supported
	-122.30939400	Longitude of glideslope aerial in decimal degrees	Eight decimal places supported
	425	Elevation in feet above MSL	Integer.
	11030	Frequency in MHZ (multiplied by 100) (paired frequency, not channel)	Integer - MHz multiplied by 100 (e.g. 123.45MHz = 12345)
	25	Maximum reception range in nautical miles	Integer - Terminal range is 25nm by default
	300180.343	Associated localizer bearing in <u>true</u> degrees prefixed by glideslope angle times 100,000	Up to three decimal places supported. Glideslope angle multiplied by 100,000 and added (e.g. Glideslope of 3.25 degrees on heading of 123.456 becomes 325123.456)
	ISNQ	Glideslope identifier	Up to four characters. Usually start with "I". Unique within airport terminal area
	KSEA	Airport ICAO code	Up to four characters. Must be valid airport code
	K1	Airport ICAO region code	Must be region code according to ICAO document No. 7910
	16L	Associated runway number	Up to three characters
	GS	Name	"GS"

Row	Meaning <i>Example value</i>	Comment <i>Explanation</i>	<i>Valid values</i>
7, 8, 9	Marker beacons	Outer (OM), Middle (MM) and Inner (IM) Markers	
	8	Row code for a middle marker	7=OM, 8=MM, 9=IM
	47.47223300	Latitude of marker in decimal degrees	Eight decimal places supported
	-122.31102500	Longitude of marker in decimal degrees	Eight decimal places supported
	433	Elevation in feet above MSL	Integer
	0	Not used	0
	0	Not used	0
	180.343	Associated localizer bearing in <u>true</u> degrees (also known as "minor axis")	Up to three decimal places supported
	ISNQ	Associated approach identifier	Identifier of localizer or ILS approach associated with marker
	KSEA	Airport ICAO code	Up to four characters. Must be valid airport code
	K1	Airport ICAO region code	Must be region code according to ICAO document No. 7910
	16L	Associated runway number	Up to three characters
	MM	Name	"OM", "MM" or "IM"
12, 13	DME	Distance Measuring Equipment	
	12	Row code for a DME	12=Suppress frequency in charts. Used for paired DMEs, 13=display frequency in charts. Used for NDB/DMEs and unpaired DMEs
	47.43433300	Latitude of DME in decimal degrees	Eight decimal places supported
	-122.30630000	Longitude of DME in decimal degrees	Eight decimal places supported
	369	Elevation in feet above MSL	Integer
	11030	Frequency in MHZ (multiplied by 100) (paired frequency, not channel)	Integer - MHz multiplied by 100 (e.g. 123.45MHz = 12345)
	25	DME service volume (formerly maximum reception range)	40, 70, 120 or 150, where 150 means 120 or more for D-OSV or 25, 40, 130, 125 like VOR. When provided, use 5.277 D-OSV, otherwise 5.35 class or 5.149 figure of merit, whichever is higher.
	0.000	DME bias in nautical miles.	Default is 0.0 - Up to one decimal place supported
	ISNQ	Identifier	Up to four characters. Unique within terminal or ICAO region.
	KSEA	Airport ICAO code (for DMEs associated with an ILS) ENRT for DMEs associated with VORs, VORTACs, NDBs or standalone DMEs	Up to four characters. Must be valid ICAO code ENRT otherwise
	K1	ICAO region code of enroute DME or terminal area airport	Must be region code according to ICAO document No. 7910 For terminal DMEs, the region code of the airport is used
	SEATTLE-TACOMA INTL DME-ILS	DME Name	Text, suffix with "DME" or "DME-ILS" Suffix "DME" to navaid name for VOR-DMEs, VORTACs & NDB-DMEs (e.g. "SEATTLE VORTAC DME" in example data) For standalone DMEs just use DME name

Row	Meaning <i>Example value</i>	Comment <i>Explanation</i>	<i>Valid values</i>
14	FPAP	Final Approach Course Alignment point of SBAS or GBAS path point	
	14	Row code for FPAP	14
	47.437969722	Latitude of FPAP in decimal degrees	Eight decimal places supported
	-122.311211111	Longitude of FPAP in decimal degrees	Eight decimal places supported
	429	Orthometric height of FPAP in feet. Use 4.1.28.2/4.1.35.2 continuation record. If unavailable, use EGM2008 geoid to convert from WGS84 ellipsoid height	Integer, Feet
	61010	WAAS channel (SBAS) or GLS channel (GBAS)	Integer
	0.0	Length Offset in meters, from stop end of runway to FPAP	Up to one decimal place supported, meters
	180.339	Final approach course in <u>true</u> degrees	Up to three decimal places supported
	R16CY	Approach procedure identifier	Up to five characters
	KSEA	Airport ICAO code	Up to four characters. Must be valid airport code
	K1	Airport ICAO region code	Must be region code according to ICAO document No. 7910
	16C	Associated runway number	Up to three characters
	LPV	Approach performance indicator	Currently supported are "LP", "LPV", "APV-II" and "GLS"
16	LTP/FTP	Landing threshold point or fictitious threshold point of GBAS or SBAS path point	
	16	Row code for LTP/FTP	16
	47.463809028	Latitude of LTP/FTP in decimal degrees	Eight decimal places supported
	-122.310985000	Longitude of LTP/FTP in decimal degrees	Eight decimal places supported
	429	Orthometric height of LTP in feet. Use 4.1.28.2/4.1.35.2 continuation record. If unavailable, use EGM2008 geoid to convert from WGS84 ellipsoid height	Integer
	61010	WAAS channel (SBAS) or GLS channel (GBAS)	Integer
	56.6	Path point threshold crossing height, feet	Up to one decimal place supported, Feet
	300180.339	Associated final approach course in <u>true</u> degrees prefixed by glidepath angle	Up to three decimal places supported. Glidepath angle multiplied by 100,000 and added (e.g. Glidepath of 3.25 degrees on heading of 123.456 becomes 325123.456)
	R16CY	Approach procedure identifier	Up to five characters
	KSEA	Airport ICAO code	Up to four characters. Must be valid airport code
	K1	Airport ICAO region code	Must be region code according to ICAO document No. 7910
	16C	Associated runway number	Up to three characters
	WAAS	Provider	Provider of the SBAS service can be "WAAS", "EGNOS", "MSAS". If no provider is specified, or this belongs to a GLS approach, use "GP"

Row	Meaning <i>Example value</i>	Comment <i>Explanation</i>	<i>Valid values</i>
15	GLS	Ground station of differential GPS used for GLS approaches	
	15	Row code for GLS	15
	-33.964605556	Latitude for differential GPS ground station in decimal degrees	Eight decimal places supported
	151.184791667	Longitude for differential GPS ground station in decimal degrees	Eight decimal places supported
	21	Elevation of differential GPS ground station in feet	Integer
	22790	GLS GBAS channel number	Integer
	0	Unused	0
	300074.656	Associated final approach course in <u>true</u> degrees prefixed by glidepath angle	Up to three decimal places supported. Glidepath angle multiplied by 100,000 and added (e.g. Glidepath of 3.25 degrees on heading of 123.456 becomes 325123.456)
	G07A	Approach procedure identifier	Up to five characters
	YSSY	Airport ICAO code	Up to four characters. Must be valid airport code
	YM	Airport ICAO region code	Must be region code according to ICAO document No. 7910
	07	Associated runway number	Up to three characters
	GLS	Name	"GLS"

FURTHER INFORMATION

Resources are available for airport designers at the X-Plane Scenery Gateway at <http://gateway.x-plane.com/>